

DEUTZ TCD 13.5


Powerful, efficient and compact.



For mobile machinery

The TCD 13.5 L6 – With 338 up to 454 kW power output ideal for your application.

- **POWERFUL** / Up to 454 kW & 2757 Nm
- **LOW EMISSIONS** / EU Stufe V / IIIA, Tier 4f / 0 & CN IV certified
- **MODULAR** / Wide range of applications due to a variety of options
- **VERSATILE** / EDG - Version* (Stage IIIA & Tier 0)
- **POWERPACK** / Modular, compact & ready for installation

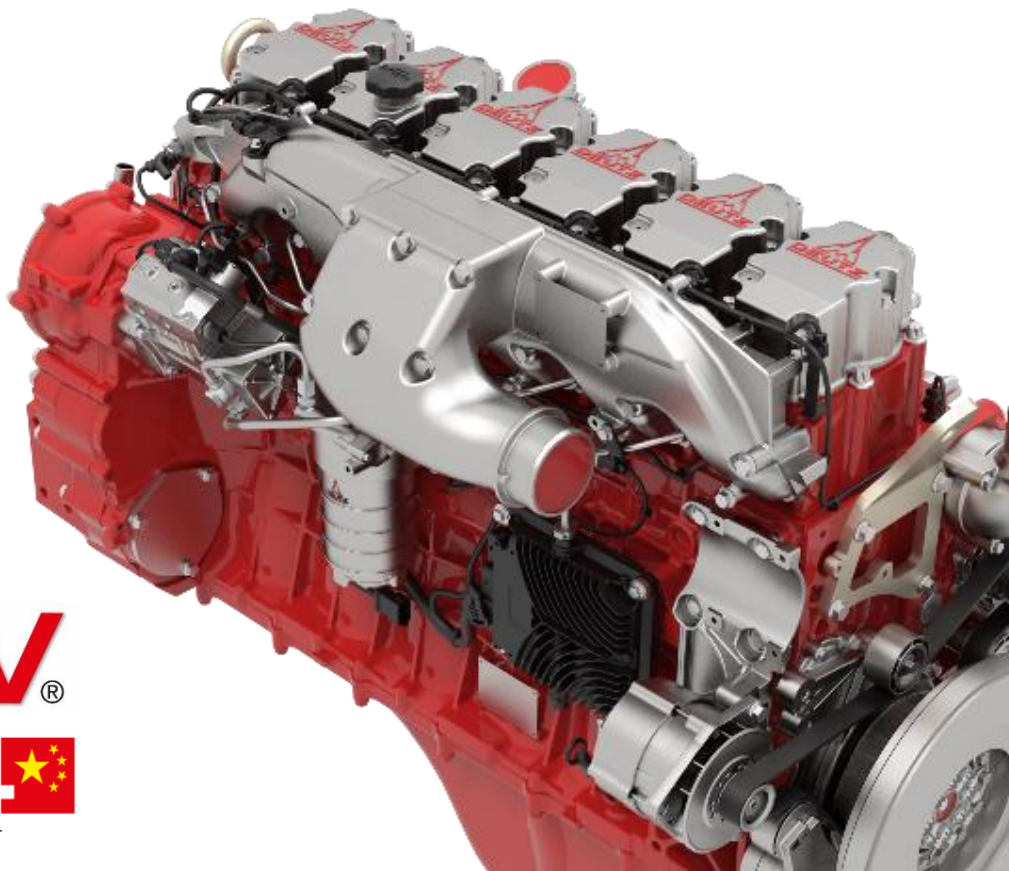



STAGE **V**
certified

CHINA
ready **4**

*Emission Downgrade without EAT

DEUTZ TCD 13.5 L6


TCD 13.5 L6

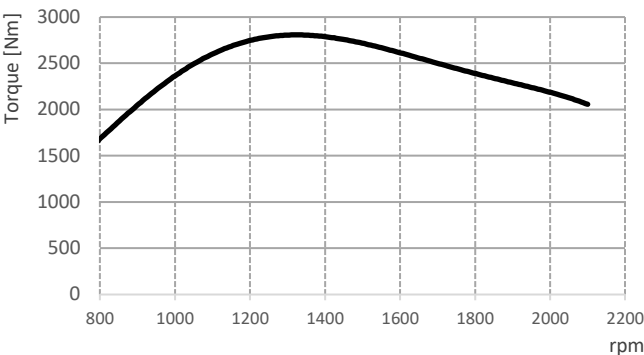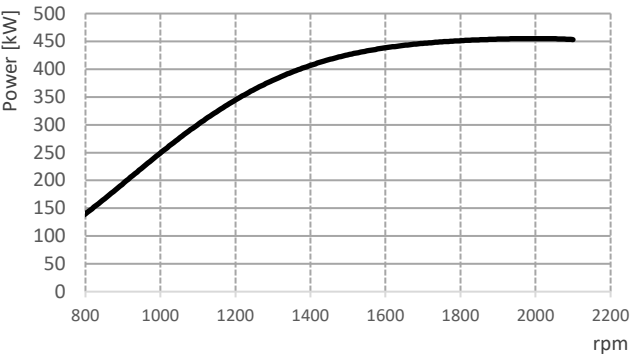

TECHNICAL DATA

ENGINE TYPE		TCD 13.5 L6
No. of Cylinders		6
Displacement	l	13.5
Max. Nominal Speed	min ⁻¹	2300
Aspiration		Turbocharger with charge air cooler
Power Output acc. ISO 14396	kW	338 - 454
At Speed	min ⁻¹	1700 - 2100
Max. Torque	Nm	2757
At Speed	min ⁻¹	1100 - 1500
Min. Idling Speed	min ⁻¹	800
Weight (DIN 70020 Part 7A)	kg	1012

DIMENSIONS

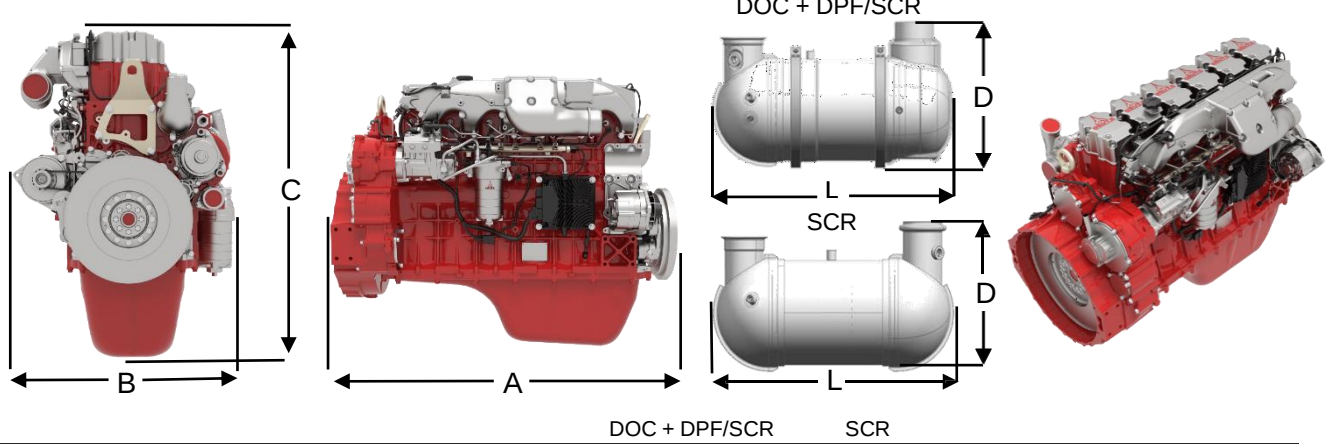

ENGINE TYPE		A	B	C	D	L	D	L	DOC + DPf/ SCR	SCR
TCD 13.5 L6	mm	1378	852	1161	806	1312	361	1379	●	■

■ Standard for US Tier 4
● Standard for EU Stage V



DEUTZ, S-DEUTZ and the DEUTZ-logo are registered trademarks. Subject to technical changes. © 2021-2023

DEUTZ AG
Ottostraße 1
51149 Cologne
Germany
www.deutz.com
www.sdeutz.com